


Voltage Detector

For AC Low Voltage Circuit

Model V-550

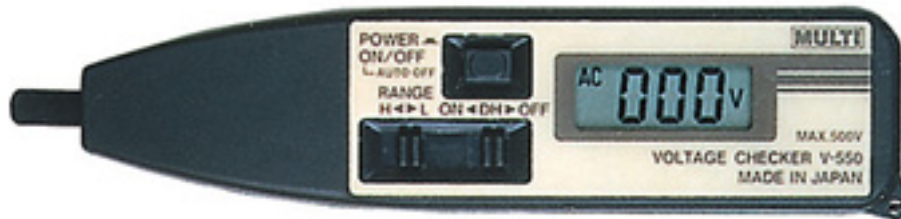

FEATURES

- Digital display for detected voltage with beeper sound.
- Can display AC voltage value by touting the insulation cover of conductor. (Approximate value)
- Accurate measurements for the bare terminal.
- Data hold and auto power off function.

SPECIFICATIONS

Display	: LCD,
Max. measuring voltage	: AC 500V
Range	: H or L
Beeping voltage	: >approx.15V
Limitation of circuit voltage	: Less than AC 600V(50/60Hz)
Auto power off	: 5 minutes later after power on
Data hold	: "DH" mark on LCD
Low battery indication	: "B" mark on LCD
Power supply	: 1.55V (LR-44) × 2
Power consumption	: Approx. 60 hours continuous
Size & weight	: 130 (L) × 30 (W) × 14 (D)mm, approx. 37g
Accessory	: Battery2 Soft case1 Instruction manual1

Accuracy : 23°C ± 5°C, 80% RH or less

Range H	Range L
Bare terminal, Outlet, Bare conductor, etc.	Insulation vinyl cover or rubber cover of conductor
Accuracy : ± 3% rdg	Approximate value (according to the materials, condition of wires, etc.)