

# LCR-8000G Series

1MHz / 5MHz / 10MHz Precision LCR Meter


## FEATURES

- Wide Test Frequency 20Hz ~ 1/5/10MHz
- 0.1% Basic Accuracy & 6 Digits Measurement Resolution
- Large LCD Display with Intuitive User Interface
- Full Measuring Functions with DUT V/I Monitor
- PASS/FAIL Function with Judgment Alarm
- DC Resistance Measurement
- Multi Step Mode
- Graph Mode
- Standard RS-232C / GPIB Interface

**GW INSTEK**

Made to Measure Since 1975

## PANEL INTRODUCTION

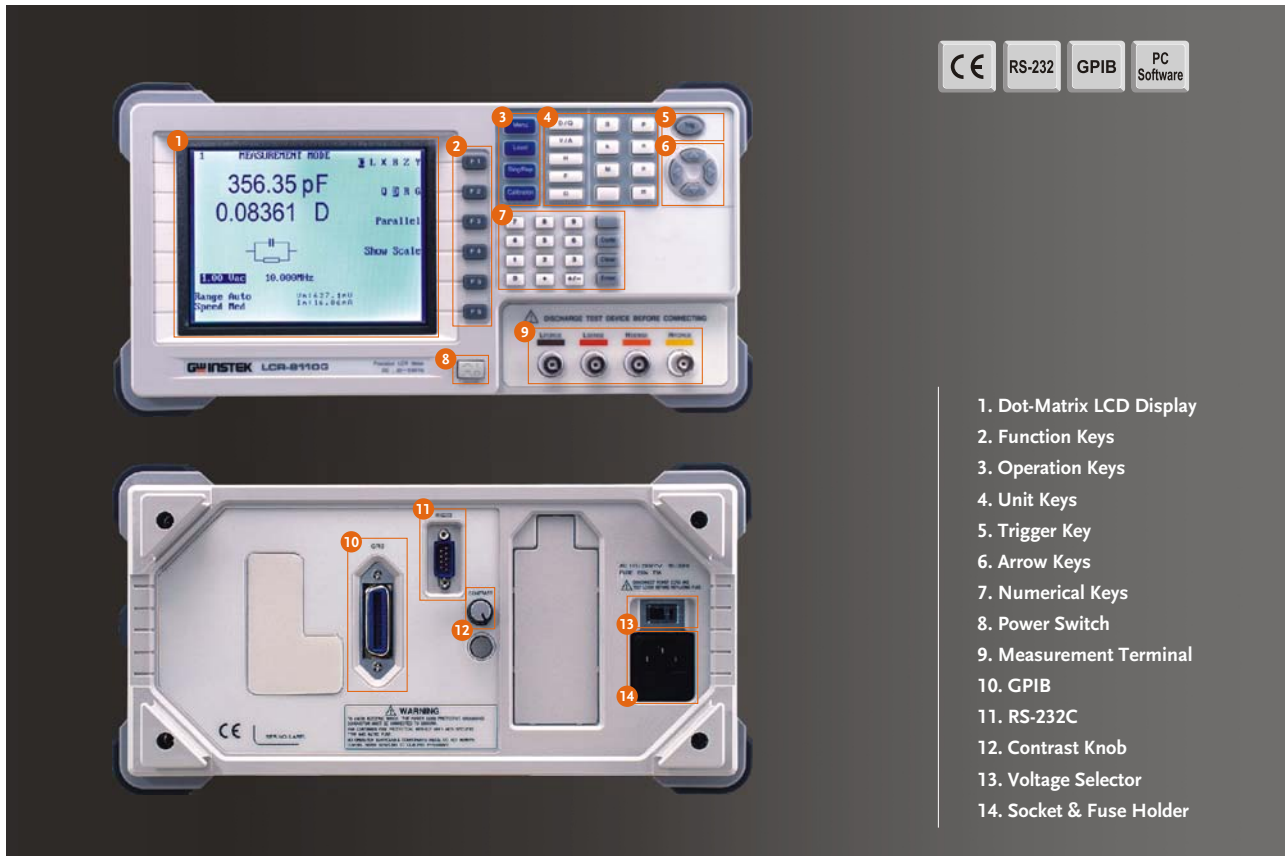

1. Dot-Matrix LCD Display
2. Function Keys
3. Operation Keys
4. Unit Keys
5. Trigger Key
6. Arrow Keys
7. Numerical Keys
8. Power Switch
9. Measurement Terminal
10. GPIB
11. RS-232C
12. Contrast Knob
13. Voltage Selector
14. Socket & Fuse Holder

## The Smarter Way to Characterize Components

The LCR-8000G Series LCR meter, with test frequency up to 10MHz, provides accuracy, versatility and high resolution for a wide range of component measurements, even including DC resistance measurement and Voltage/Current monitoring. The Multi-Step function allows on-screen programming of customized measurement sequence with Pass/Fail indication. Each program includes 30 test steps and each test step can be set with selected parameters and test limits. Under Multi-Step operation, a tedious work routine can be done step by step automatically just at a press of a button. With Graph Mode, LCR-8110G, LCR-8105G and LCR-8101G display the component impedance response either over a wide range of test frequency sweep or over a wide range of test voltage sweep in a graph chart. This gives an analysis result of either impedance vs. frequency or impedance vs. applied voltage all at a glance. GPIB and RS-232C interfaces are available as standard for instrument control and test result display on the PC. The rich features of LCR-8000G Series easily make your measurement tasks done at a very competitive price.

### APPLICATIONS

- **Education Lab and Training Institution**  
The large LCD display and user friendly interface allows operators with little to no training to get practical measurements right from the start.
- **Research & Design**  
Graphical sweep measurements can be plotted on screen to visually verify component and material response to changes in test frequency or voltage, without the need for complex programming.
- **Quality Assurance Verification**  
A wide range of components can be accurately tested to a high resolution using versatile functions over a wide frequency range.

### 10MHz Precision LCR Meter



LCR-8110G

### 5MHz Precision LCR Meter



LCR-8105G

### 1MHz Precision LCR Meter




LCR-8101G

## A. FRIENDLY INTUITIVE USER INTERFACE



The LCR-8000G Series is designed to perform precision impedance measurements over a wide frequency range of 20Hz~1MHz for LCR-8101G, 20Hz~5MHz for LCR-8105G and 20Hz~10MHz for LCR-8110G. The instrument is capable of measuring 11 different parameters with 0.1% basic accuracy, which meets the precision measurement requirements of components and modules used in the RF circuits. The large LCD display with single-layer operation menu of LCR-8000G Series provides users with ultimate convenience to plug and play without much learning time.

## B. GRAPH MODE



The graph function shows the component characteristics in visual manner. Either voltage sweep or frequency sweep can be selected for horizontal scale. Just select the parameter, and set the start/stop voltage or the start/stop frequency of the sweep, LCR-8000G will run through the sequence of measurements and show the results on a graph. This graphical parameter measurement performs the characteristic verification of components and materials over the response to the changes in AC test frequency or AC test voltage without the need of complex programming of an external controller. When the graph gets out of the vertical range, the LCR-8000G Series can automatically adjust the scale to get full test information. On the graph the marker operation is available for detailed observation.

## C. MULTI STEP MODE

MULTI STEP MODE Set				Prog
Step	01	02	03	
Func	Is	Is	Is	Copy
Freq	1.0000k	10.000k	100.00k	Delete
Volt	1.00 V	1.00 V	1.00 V	Save
Bias				File
Spd	FAST	FAST	FAST	RUN
Hi	2.0000mH	2.0000mH	2.0000mH	
Lo	0.1000mH	100.00mH	100.00mH	
Dly	0 mS	0 mS	0 mS	



MULTI STEP MODE Run				Start
Freq	Volt	Result		
1	1.0000k 1.00 V	0.0936mH	LO	
2	10.000k 1.00 V	1.8708mH	PASS	
3	100.00k 1.00 V	2.5852mH	HI	

FAIL SET

The Multi-Step mode is capable of running a series of measurements of a component at a number of user-defined steps in sequence automatically. Total 64 programs can be saved into the non-volatile memory, and each program contains up to 30 test steps. The parameter and Hi/Lo limits can be set respectively for each test step. After a program being properly edited, the instrument can run

through all the measurement steps either at a press of the button under the Manual Trigger selection, or automatically run the program by detecting the connection of a DUT under the Auto Trigger selection. When all the test steps are completed, the screen shows the measurement reading of the parameter being selected for each step with Pass, HI, or LO measurement result.

## D. PASS/FAIL FUNCTION WITH JUDGMENT ALARM



In the Pass/Fail test, primary parameter measurement result is compared with user-defined limits and the pass or fail result is then displayed. Three methods, including absolute limit, percentage and delta limit, are available for Hi(high) and Lo(low) limit setting based on the nominal test value. The Pass/Fail test checks whether the parameter measurement result sits within the limits, then display "PASS" for within the limits, or "LO" for lower than the low limit,

or "HI" for higher than the high limit. A scale and bar for displaying measurement result is shown at the center of the screen to give a graphical identification, which greatly reduces operator's load in a long time inspection work. This scale and bar also facilitate the adjustment of the variable components. Either Pass or Fail result can be set with a buzzer alarm, which makes component or material sorting easy with sound identification.

## SPECIFICATIONS

<b>TEST FREQUENCY</b>	20Hz ~ 1MHz/5MHz/10MHz, 5 Digits, $\pm 0.005\%$																		
<b>INPUT IMPEDANCE</b>	100 $\Omega$																		
<b>BASIC ACCURACY</b>	$\pm 0.1\%$ (R, Z, X, G, Y, B, L, C)																		
<b>TEST SPEED</b>	AC (>2kHz) MAX: 75mS FAST: 150mS MEDIUM: 450mS SLOW: 600mS	DC MAX: 30mS FAST: 60mS MEDIUM: 120mS SLOW: 900mS																	
<b>TEST SIGNAL LEVELS</b>	<table border="1"> <thead> <tr> <th>Test Frequency</th> <th>Test Signal Level (rms)</th> <th>Step</th> <th>Accuracy</th> </tr> </thead> <tbody> <tr> <td><math>\leq 3\text{MHz}</math></td> <td>10mV ~ 2V</td> <td>1mV/10mV</td> <td>2%<math>\pm</math> 5mV</td> </tr> <tr> <td><math>&gt; 3\text{MHz}</math></td> <td>10mV ~ 1V</td> <td>1mV/10mV</td> <td>2%<math>\pm</math> 5mV</td> </tr> </tbody> </table>			Test Frequency	Test Signal Level (rms)	Step	Accuracy	$\leq 3\text{MHz}$	10mV ~ 2V	1mV/10mV	2% $\pm$ 5mV	$> 3\text{MHz}$	10mV ~ 1V	1mV/10mV	2% $\pm$ 5mV				
Test Frequency	Test Signal Level (rms)	Step	Accuracy																
$\leq 3\text{MHz}$	10mV ~ 2V	1mV/10mV	2% $\pm$ 5mV																
$> 3\text{MHz}$	10mV ~ 1V	1mV/10mV	2% $\pm$ 5mV																
<b>SHORT CIRCUIT CURRENT</b>	Max. 20mA																		
<b>MEASUREMENT RANGES</b>	<table border="1"> <thead> <tr> <th>Mode</th> <th>Measure Range</th> </tr> </thead> <tbody> <tr> <td>R, Z, X, Rdc</td> <td>0.1m<math>\Omega</math> ~ 100M<math>\Omega</math></td> </tr> <tr> <td>G, Y, B</td> <td>10nS ~ 1000S</td> </tr> <tr> <td>L</td> <td>0.1nH ~ 100kH</td> </tr> <tr> <td>C</td> <td>0.01pF ~ 1F</td> </tr> <tr> <td>D</td> <td>0.00001 ~ 9.9999</td> </tr> <tr> <td>Q</td> <td>0.1 ~ 9999.9</td> </tr> <tr> <td><math>\theta</math></td> <td>-180<math>^\circ</math> ~ +180<math>^\circ</math></td> </tr> </tbody> </table>			Mode	Measure Range	R, Z, X, Rdc	0.1m $\Omega$ ~ 100M $\Omega$	G, Y, B	10nS ~ 1000S	L	0.1nH ~ 100kH	C	0.01pF ~ 1F	D	0.00001 ~ 9.9999	Q	0.1 ~ 9999.9	$\theta$	-180 $^\circ$ ~ +180 $^\circ$
Mode	Measure Range																		
R, Z, X, Rdc	0.1m $\Omega$ ~ 100M $\Omega$																		
G, Y, B	10nS ~ 1000S																		
L	0.1nH ~ 100kH																		
C	0.01pF ~ 1F																		
D	0.00001 ~ 9.9999																		
Q	0.1 ~ 9999.9																		
$\theta$	-180 $^\circ$ ~ +180 $^\circ$																		
<b>MEASUREMENT PARAMETERS</b>	Impedance (Z), Phase Angle ( $\theta$ ), Inductance (L), Capacitance (C), AC Resistance (Rac), Quality Factor (Q), Dissipation Factor (D), Admittance (Y), Conductance (G), Reactance (X), Susceptance (B), DC Resistance (Rdc)																		
<b>SERIES OR PARALLEL EQUIVALENT CIRCUIT</b>	C + R, C + D, C + Q, L + R, L + Q, L + D																		
<b>SERIES EQUIVALENT CIRCUIT ONLY</b>	X + R, X + D, X + Q																		
<b>PARALLEL EQUIVALENT CIRCUIT ONLY</b>	C + G, B + G, B + D, B + Q, B + R, L + G																		
<b>POLAR FORM</b>	Z + Phase Angle, Y + Phase Angle																		
<b>LCD DISPLAY</b>	320 x 240 DOT-MATRIX																		
<b>INTERFACE</b>	RS-232C, GPIB																		
<b>POWER SOURCE</b>	AC 115V (+10%/-25%), AC 230V (+15% / -14%)(Selectable), 50/60Hz																		
<b>DIMENSIONS &amp; WEIGHT</b>	330(W) x 170(H) x 340(D)mm, Approx. 5kg																		

Specifications subject to change without notice. CR-8000GGD1BH

## ORDERING INFORMATION

<b>LCR-8110G</b>	10 MHz Precision LCR Meter
<b>LCR-8105G</b>	5 MHz Precision LCR Meter
<b>LCR-8101G</b>	1 MHz Precision LCR Meter


## STANDARD ACCESSORIES

User manual x 1
Power cord x 1
Test lead LCR-12 x 1

## OPTIONAL ACCESSORIES SELECTION GUIDE

Accessory Model	Brief Description	LCR-8101G	LCR-8105G	LCR-8110G
<b>LCR-05</b>	Test Fixture for axial & radial leaded components	✓	△	△
<b>LCR-06A</b>	Test Lead with Kelvin clip (4 wiretype)	✓	△	△
<b>LCR-07</b>	Test Lead with Alligator clip (2 wiretype)	✓	△	△
<b>LCR-08</b>	Test Fixture (Tweezers) for SMD/Chip components	✓	△	△
<b>LCR-09</b>	Test Fixture for SMD/Chip components	✓	✓	✓
<b>LCR-12</b>	Test Lead with Kelvin clip (4 wire type)	✓	✓	✓
<b>LCR-13</b>	Test Fixture for SMD/Chip components	✓	✓	✓
<b>GTL-232</b>	RS-232C Cable	✓	✓	✓
<b>GRA-404</b>	Rack Adapter Panel (19", 4U)	✓	✓	✓

Note : "△" means the accessories work with a frequency limitation (under 1MHz)

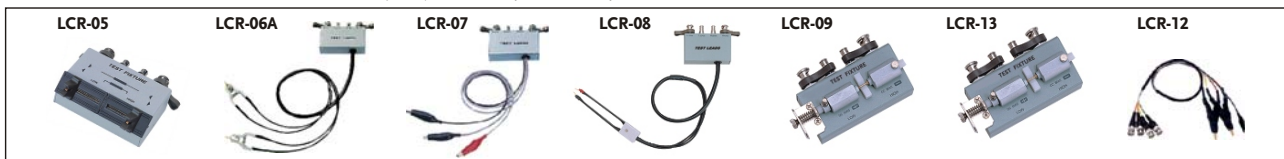

Global Headquarters  
**GOOD WILL INSTRUMENT CO., LTD.**  
 No. 7-1, Jhongsing Road, Tucheng City, Taipei County 236, Taiwan  
 T +886-2-2268-0389 F +886-2-2268-0639  
 E-mail: marketing@goodwill.com.tw

China Subsidiary  
**GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.**  
 NO. 69, Lushan Road, Snd, Suzhou Jiangsu 215011 China  
 T +86-512-6661-7177 F +86-512-6661-7277  
 E-mail: marketing@instek.com.cn

Malaysia Subsidiary  
**GOOD WILL INSTRUMENT (M) SDN. BHD.**  
 27, Persiaran Mahsuri 1/1, Sunway Tunas,  
 11900 Bayan Lepas, Penang, Malaysia  
 T +604-6309988 F +604-6309989  
 E-mail: sales@goodwill.com.my

U.S.A. Subsidiary  
**INSTEK AMERICA CORP.**  
 3661 Walnut Avenue Chino, CA 91710, U.S.A.  
 T +1-909-5918358 F +1-909-5912280  
 E-mail: sales@instekamerica.com

Japan Subsidiary  
**INSTEK JAPAN CORPORATION**  
 4F, Prosper Bldg, 1-3-3 Iwamoto-Cho Chiyoda-Ku,  
 Tokyo 101-0032 Japan  
 T +81-3-5823-5656 F +81-3-5823-5655  
 E-mail: info@instek.co.jp

Korea Subsidiary  
**GOOD WILL INSTRUMENT KOREA CO., LTD.**  
 Room No.805, Ace Hightech-City B/D 1Dong,  
 Mullae-Dong 3Ga 55-20, Yeongduengpo-Gu, Seoul, Korea  
 T +82 2 3439 2205 F +82 2 3439 2207  
 E-mail: gwinstek@gwinstek.co.kr